

Specifications

RESPONSE


Frequency Response (-10 dB).	55 - 20.000 Hz
Frequency Range with Preset.	80 - 20.000 Hz
Coverage H.	90°
Coverage V.	40°
Nominal Impedance.	8 Ohms
Power AES.	600 W.
Program Power.	1.200 W.
Máx. SPL (dB SPL @ 1 m.).	128 / 134
Transducers HF.	3 x driver
Transducers LF.	1 x 10"

ENCLOSURE


Dimensions.	Plywood
Net Weight.	60 x 29 x 44 cm.
Finish painted.	17 kg.
Grill perforate steel.	Warnex ® Black
Connectors.	Foam backed
Rigging.	2 NL4
Handles.	Yes
Floor stand.	Two side and one rear
Mounting pole cup.	No
	No

Cad.

Rear

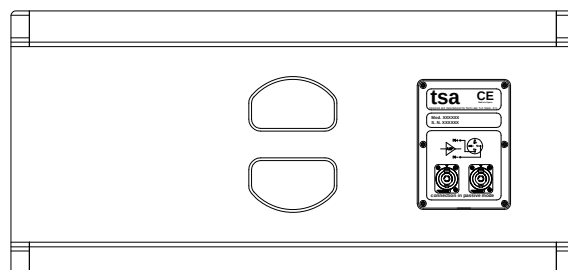

Zenithal.

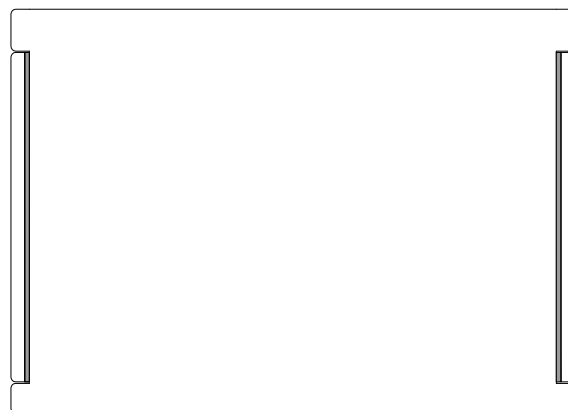


Aplicaciones / Applications


- El AX-110LE, es un sistema Line Array pasivo de 10 pulgadas de altura .
- La apertura máxima entre unidades es de 10°.
- Monta un altavoz de 10 pulgadas para la vía de medios graves y tres motores para la vía de medios agudos.
- Utiliza un doble mecanismo de anclaje para facilitar su montaje: Incorporando una fijación variable a través de un pin magnético, que oscila entre 0° y 10°, a modo de corredera y otro pin de posicionamiento fijo para determinar el ángulo entre unidades.
- El Sistema de volado utiliza el mismo mecanismo de regulación que las propias unidades.

- The AX-110LE, is a passive line array system 10 inches tall.
- The maximum opening between units is 10 °.
- Mounts a 10 inch speaker bass frequencies and three drivers for high frequencies.
- Use dual anchoring mechanism for facilitating assembly: incorporating a variable across a magnetic fixing pin, which is between 0 ° and 10 °, as a slide and a positioning pin fixed to determine the angle between units.
- The flying system uses the same mechanism of regulation that the units themselves

Front.

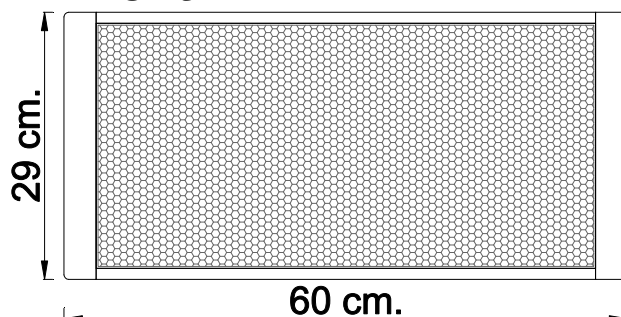

Lateral.

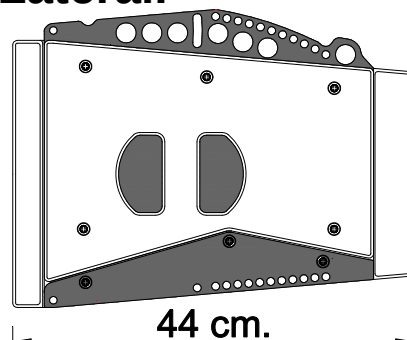

Basic configuration

