

Especificaciones / Specifications

RESPONSE

Frequency Response (-10 dB).	60 - 19.000 Hz.
Frequency Range with Preset.	80 - 19.000 Hz.
Coverage H.	110°.
Coverage V.	Depends on configuration.

POWER

Nominal Impedance.	LF: 4 Ohms. / HF: 16 Ohms.
Power AES.	LF: 1.000 W. / HF: 140 W.
Program Power.	LF: 2.000 W. / HF: 280 W.

MAXIMUM SPL

Máx. SPL (dB SPL @ 1 m.). (1 unit)	137 / 143. (Calculated)
Máx. SPL (dB SPL @ 1 m.). (2 units)	141 / 147. (Calculated)
Máx. SPL (dB SPL @ 1 m.). (4 units)	145 / 151. (Calculated)


MOUNT

Transducers HF.	2 x driver 1,4".
Transducers LF.	2 x 10".
ENCLOSURE	Plywood.
Dimensions.	62,5 x 30,5 x 57,5 cm.
Net Weight.	39 kg.
Finish painted.	Warnex ® Black.
Connectors.	2 NL4.
Rigging.	Yes.
Handles.	Two side and two rear.


Imagen / Image




Cad.

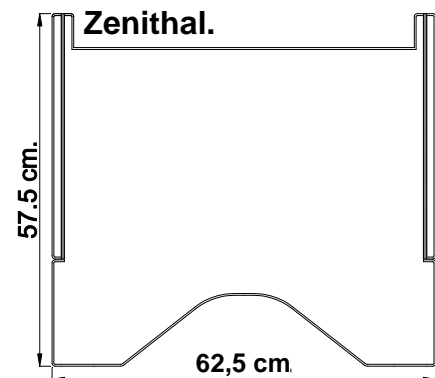


Front.

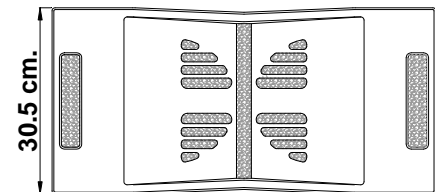

Rear.

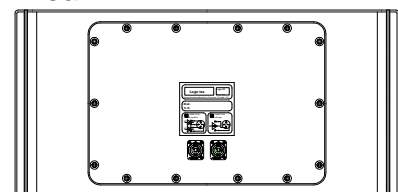

Lateral.

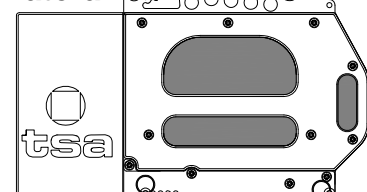

Aplicaciones / Applications

- El AX-210S, es un sistema Line Array pasivo de 10 pulgadas de altura .

- La apertura máxima entre unidades es de 5°.

- Monta 2 altavoces de 10 pulgadas para la vía de medios graves y dos motores de 1,4 pulgadas acoplados a sus guías de onda, para la vía de medios agudos.

- Utiliza un doble mecanismo de anclaje para facilitar su montaje: Incorporando una fijación variable a través de un pin magnético, que oscila entre 0° y 5°, a modo de corredera y otro pin de posicionamiento fijo para determinar el ángulo entre unidades.

- El Sistema de volado utiliza el mismo mecanismo de regulación que las propias unidades.

- The AX-210S, is a passive line array system 10 inches tall.

- The maximum opening between units is 5°.

Mounts two 10 inch speaker bass frequencies and two 1,4 -inch drivers for high frequencies.



- Use dual anchoring mechanism for facilitating assembly: incorporating a variable across a magnetic fixing pin, which is between 0° and 5°, as a slide and a positioning pin fixed to determine the angle between units.

- The flying system uses the same mechanism of regulation that the units themselves



Herrajes / Hardware


Sistema de volado / Flying system

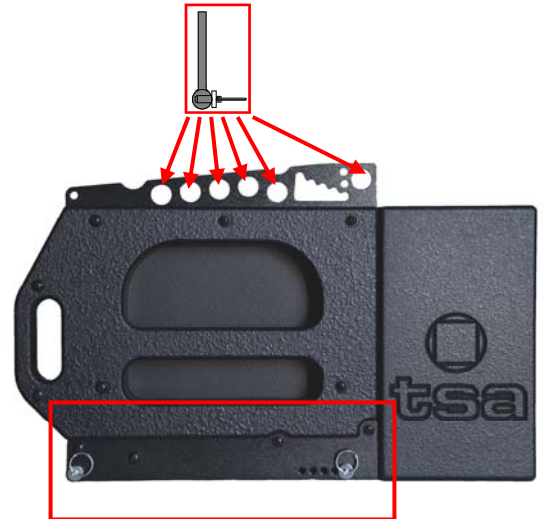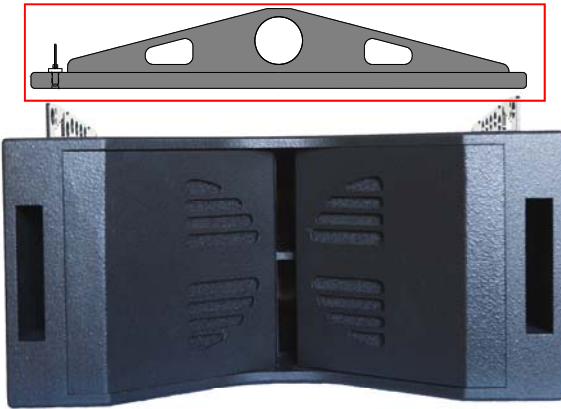


Conexiones / Connections




Configuración de 3 unidades / Configuration 3 units

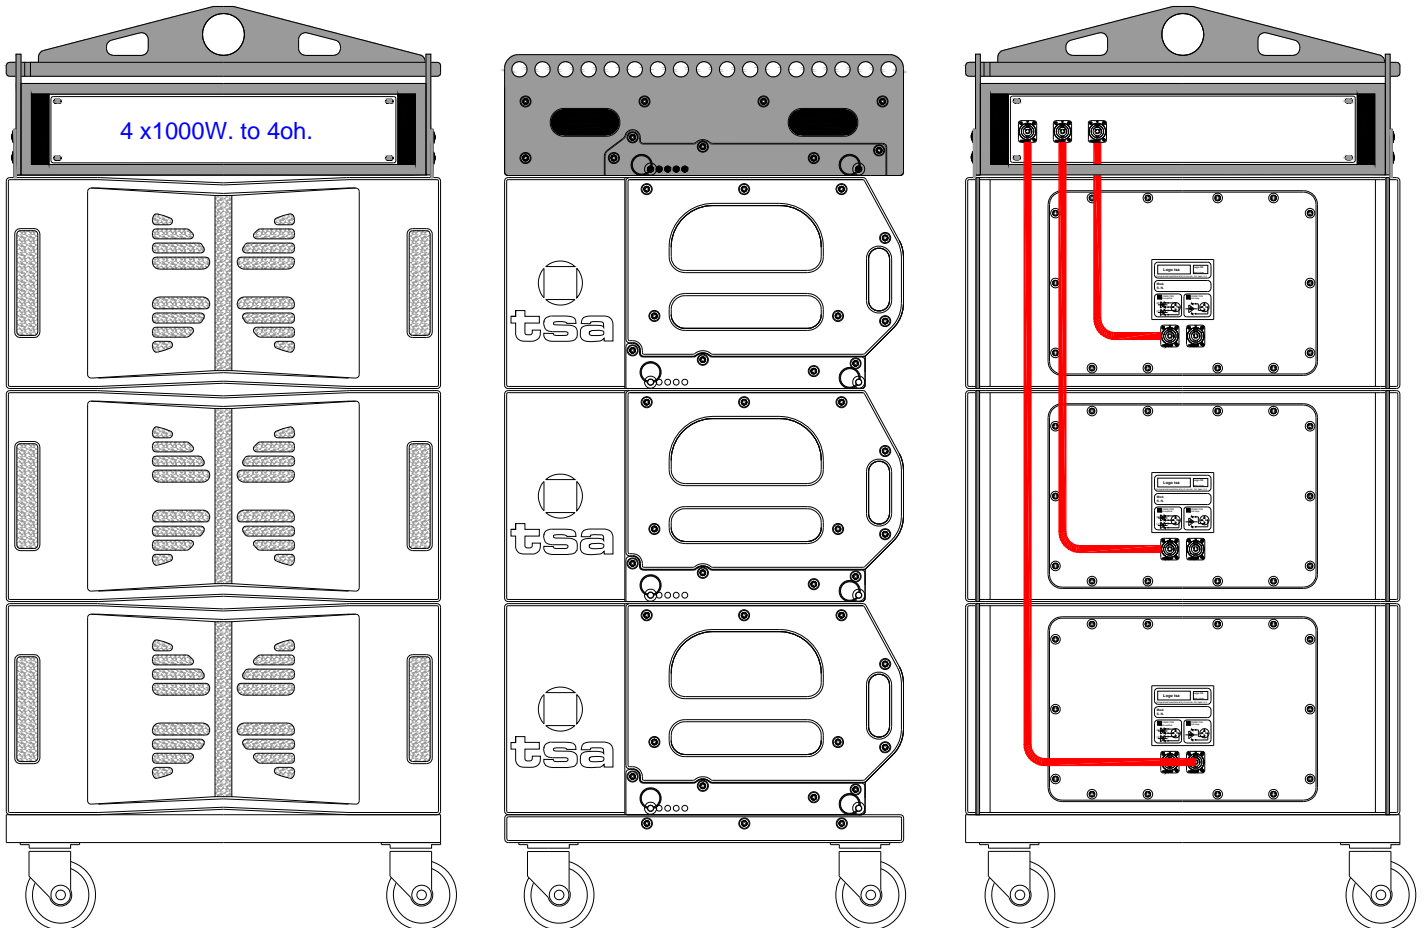



3 units: AX-210S
LF: 1000 W AES / 4 oh.
HF: 140 W AES / 16 oh.

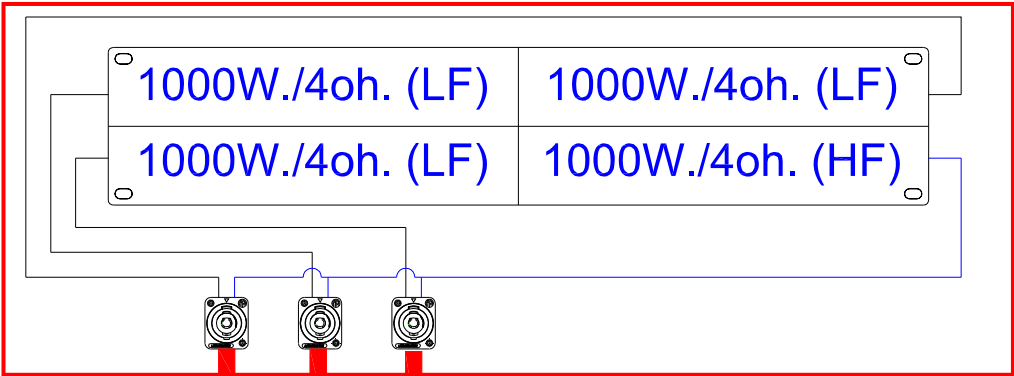


Configuración de 3 unidades / Configuration 3 units

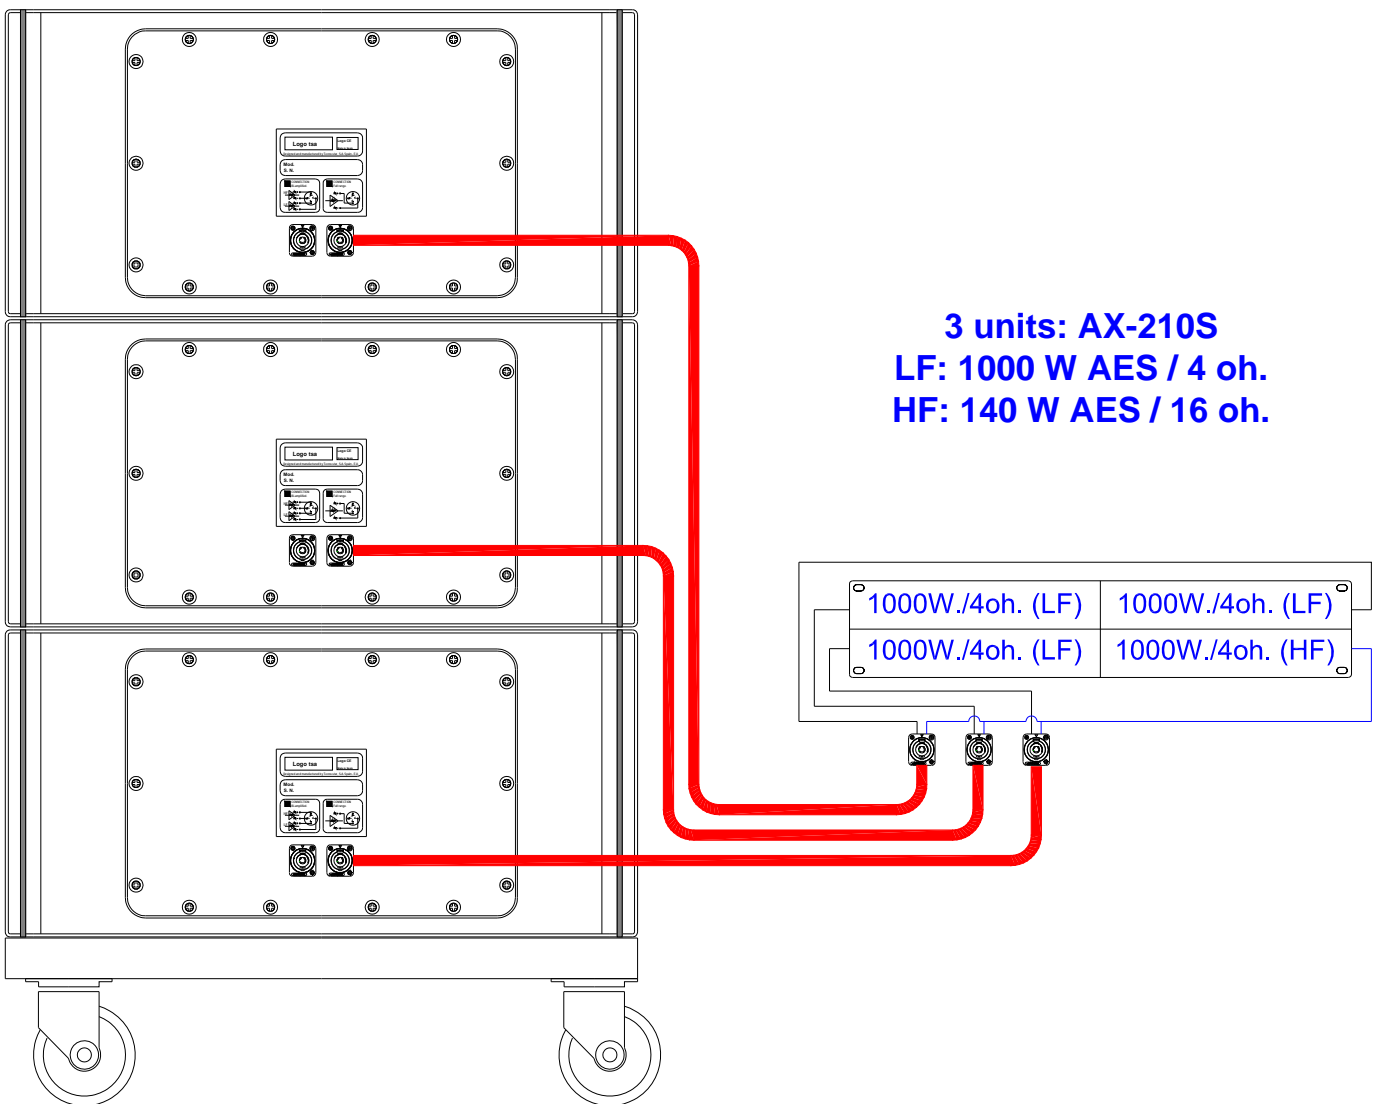


Configuración de 6 unidades / Configuration 6 units

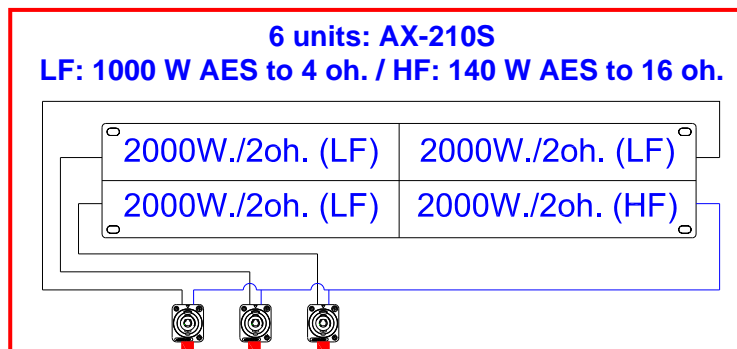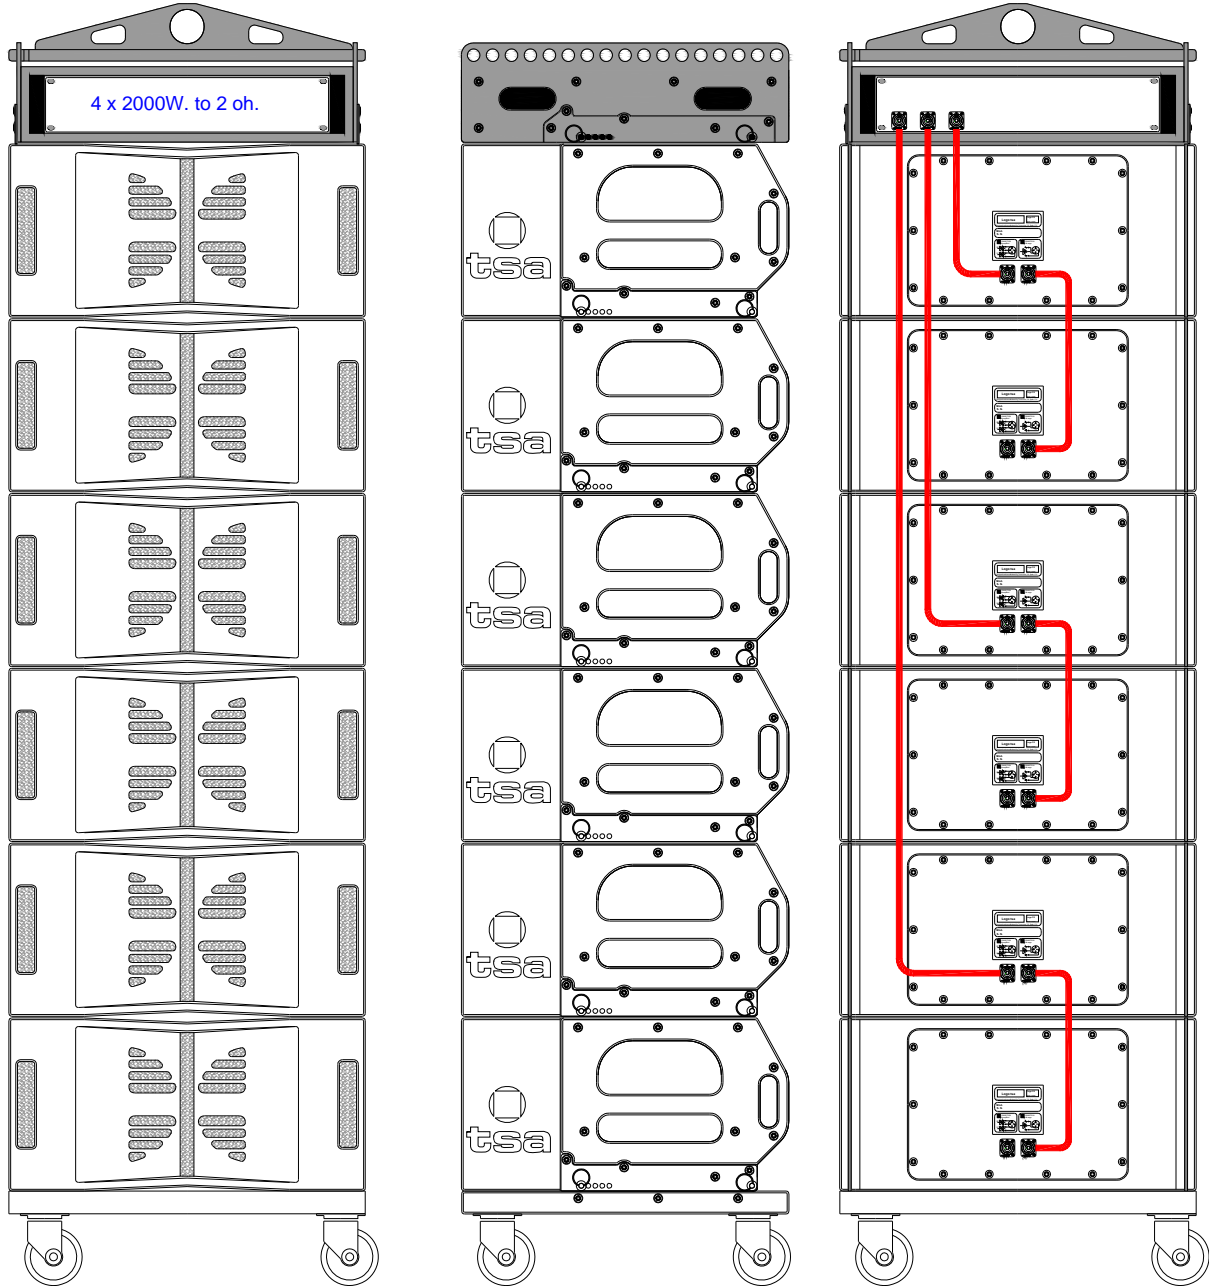

Configuración de 6 unidades / Configuration 6 units

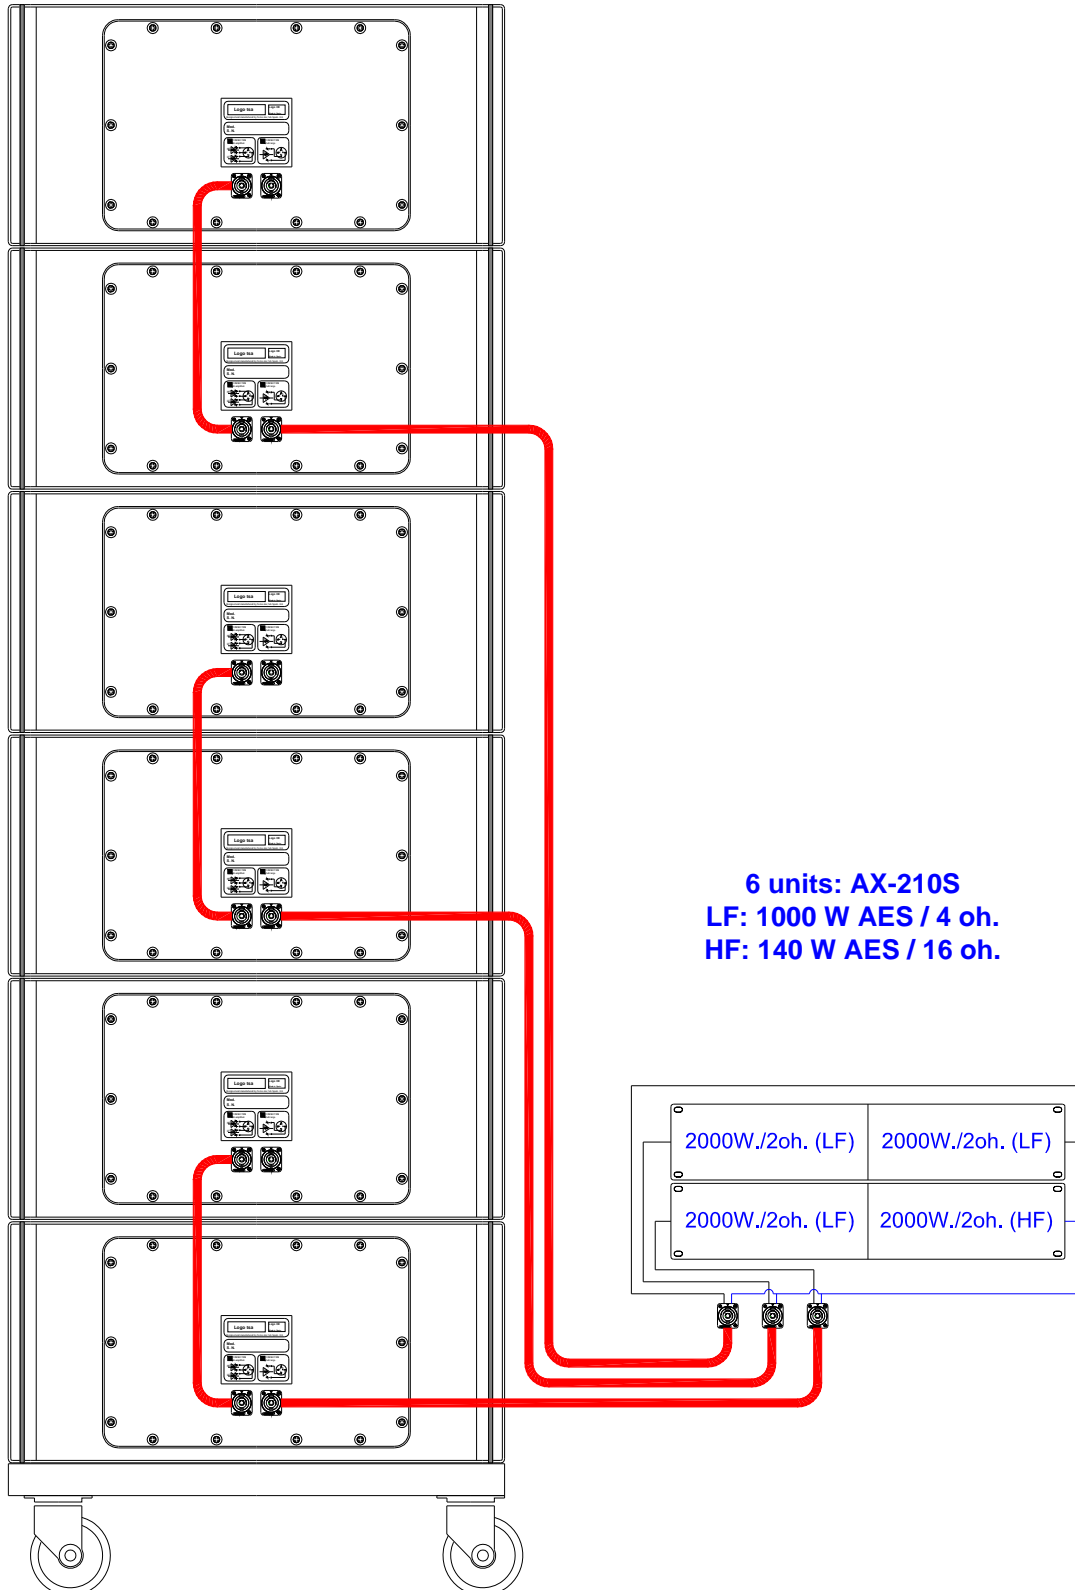

Configuración de 6 unidades / Configuration 6 units

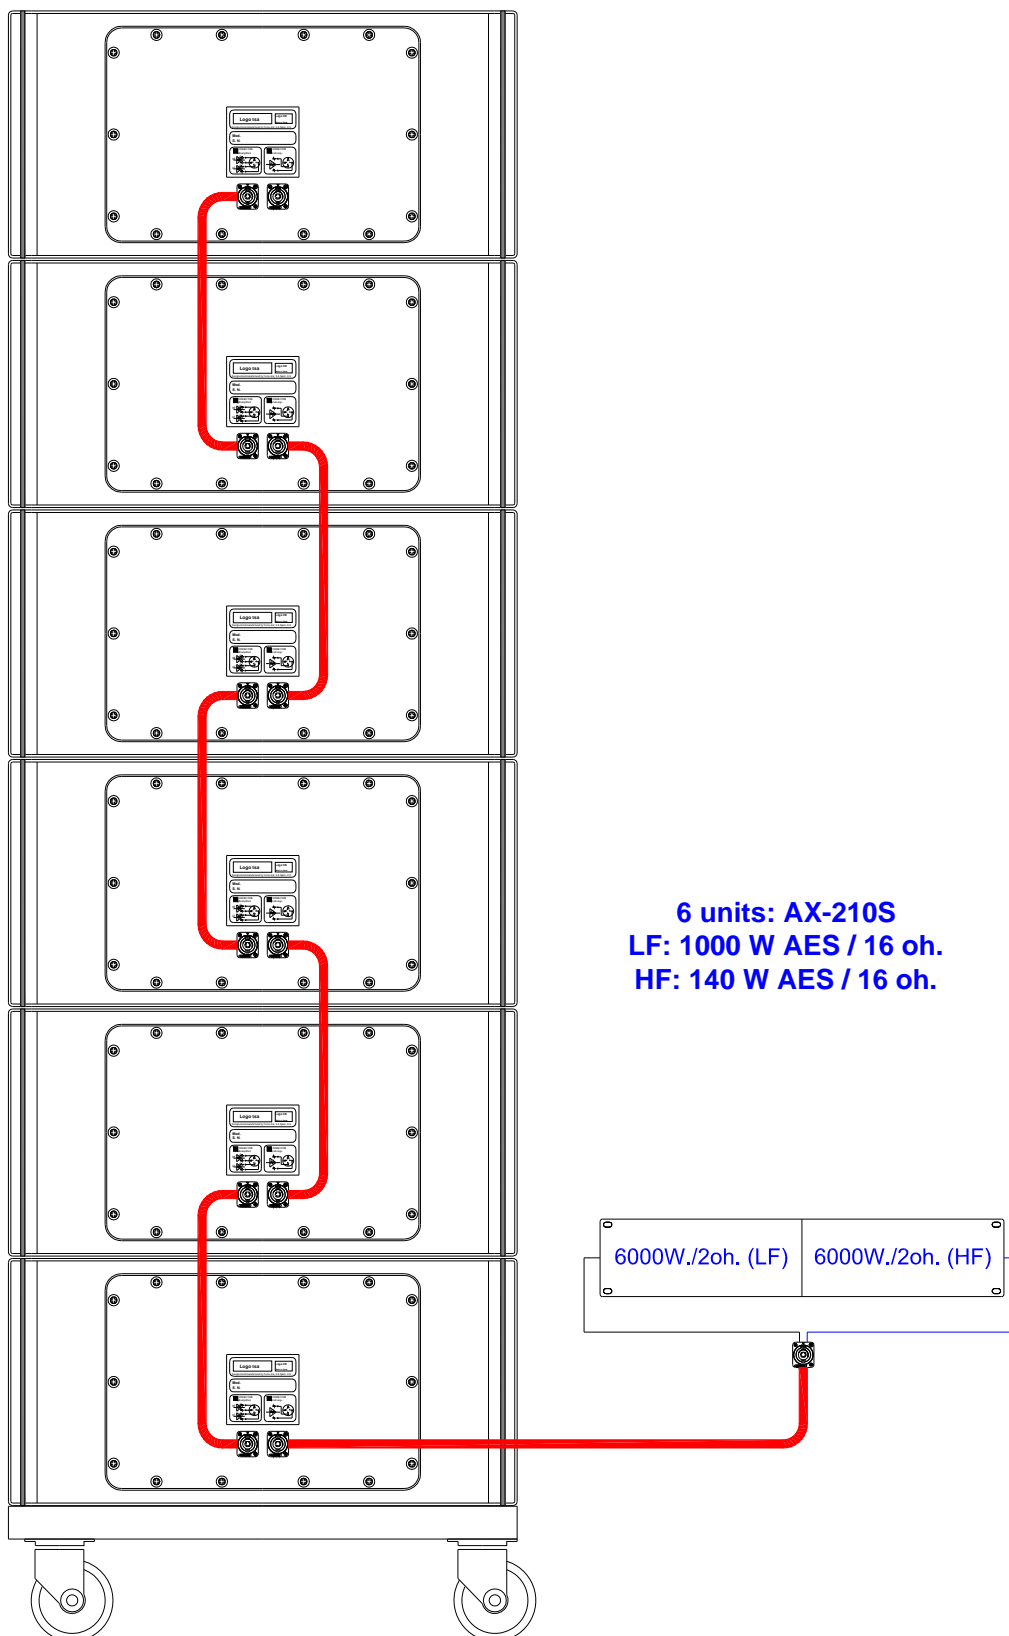

Configuración de 12 unidades / Configuration 12 units

