

Specifications

RESPONSE

Frequency Response (-10 dB).	50 - 20.0000 Hz.
Frequency Range with Preset.	50 - 20.0000 Hz.
Coverage H.	80°.
Coverage V.	50°.
Nominal Impedance.	8 Ohms.
Power AES.	1.000 W.
Program Power.	2.000 W.
Máx. SPL (dB SPL @ 1 m.).	133 / 139.
Transducers HF.	1 X driver 1,4".
Transducers LF.	1 x 15".

ENCLOSURE

Dimensions.	45 x 73 x 58 cm.
Net Weight.	24 kg.
Finish painted.	Warnex ® Black.
Grill perforate steel.	Foam backed.
Connectors.	2 NL4.
Rigging.	No.
Handles.	Yes.
Floor stand.	Yes.
Mounting pole cup.	Yes.

Photo



Cad.

Aplicaciones / Applications

- La pantalla acústica **MULTY15ND** monta un altavoz de medios graves de 15" y un motor de 1,4" para la reproducción de las frecuencias medias altas.

- Incorpora asas de transporte y un vaso para insertar un trípode en la base.

- El diseño estructural del recinto, permite montarlo sobre un trípode.


- Recinto construido con tablero de abedul fenólico de 15 mm. de espesor y acabado en pintura negra Warnex ® negra.

- The acoustic enclosure **MULTY15ND** mounts a 15" mid/woofer unit, 1,4" Driver to reproduce the mid/high frequency range.

- It incorporates transport handles and a bottom pole cup for use with speaker poles.

- The enclosure design allows its application as suspended or pole mounted.

- The enclosure is made of phenolic birch plywood 15 mm. (0.6") thick, painted in wear resistant Warnex® black paint.

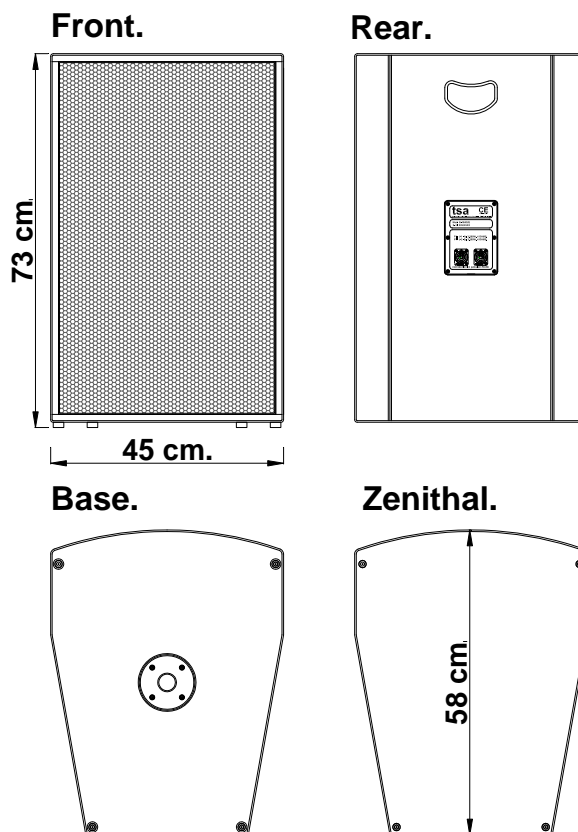

Configuración / Basic configuration

