

Descripción / Description

El AX-112/A, es un sistema Array esférico, la altura de cada unidad es de 12 pulgadas, se alimenta con amplificación de 1 vía externa.

Monta un altavoz de 12 pulgadas para la vía de medios graves y un motor de 1 pulgadas, para la vía de agudos.

Ofrece una gran flexibilidad en su aplicación, tanto para el mercado de las instalaciones fijas, como móviles. Se utiliza para sonorizar eventos de pequeño formato, suele combinarse apoyado con los refuerzos de subgraves: SB-18 o SB-218.

La apertura vertical máxima entre unidades es de 10°. Para facilitar su montaje incorpora un doble mecanismo de anclaje que utiliza: Una fijación variable que oscila de entre 0° y 10° a modo de corredera y otra de posicionamiento fijo para determinar el ángulo entre unidades. El Sistema de volado monta el mismo mecanismo de regulación que las propias unidades.

The AX-112/A, is a spherical Array system, the height of each unit is 12 inch, is a 1-way system, is powered by one amplifier channel and houses one 12 inch low frequency drivers, and one 1 inch high frequency compression drivers.

The sound system offers a wide range of possibilities for fixed and mobile installations and is an excellent choice for little sound reinforcement applications. The SB-18 or SB-218 subwoofer is used to reinforce the low frequencies.

The vertical splay angles between units is 10°. It has an integrated double rigging mechanism for easy and quick deployment, a mobile element that allows splay angles of 0° to 10°, and another fixed element to configure the splay angles between units. The rigging hardware features the same mechanism.

Imagen / Image



Especificaciones / Specifications

RESPONSE


Frequency Response (-10 dB).	50 - 19.000 Hz.
Frequency Range with Preset.	80 - 19.000 Hz.
Coverage H.	90°.
Coverage V.	40°.
Nominal Impedance.	LF: 8 Ohms. / HF: 8 Ohms.
Power AES.	600 W.
Program Power.	1.200 W.
Máx. SPL (dB SPL @ 1 m.).	128,5 / 134.
Transducers HF.	1 x driver 1". (Ferrite)
Transducers LF.	1 x 12". (Ferrite)

ENCLOSURE

Dimensions.	62 x 33 x 55 cm.
Net Weight.	29 kg.
Constructed.	Baltic birch plywood.
Finish painted.	Warnex ® Black.
Grill perforate steel.	Foam backed.
Connectors.	2 NL4: (+1/-1).
Rigging.	Yes.
Handles.	Two side and one rear.
Floor stand.	No.
Mounting pole cup.	No.

Cad.

Front

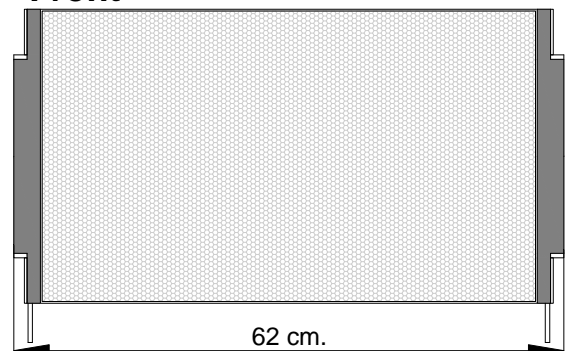

Lateral

